


DEMOLITION & EROSION CONTROL

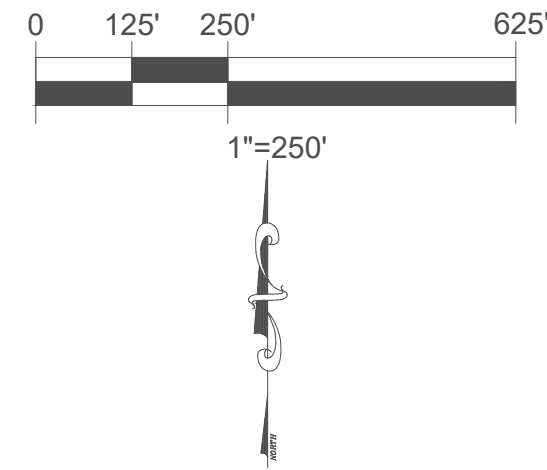

1. INSTALL ROW SILT FENCE PRIOR TO ANY EARTH DISTURBING ACTIVITIES.
2. CONTRACTOR TO REMOVE ANY MUD TRACKED ONTO EXISTING PAVEMENT EVERY NIGHT.
3. A CONCRETE WASHOUT SHOULD BE PROVIDED ON-SITE. CONCRETE CANNOT BE WASHED OUT INTO THE PUBLIC RIGHT-OF-WAY OR STORM SEWER SYSTEM.

1. CONTRACTOR SHALL REMOVE THE EXISTING FARM ROAD AS SHOWN.
2. CONTRACTOR TO REMOVE TREES AS SHOWN. IF ANY OTHER TREES ARE TO BE REMOVED DUE TO CONFLICT WITH PROPOSED IMPROVEMENTS, CONTRACTOR MUST CONTACT BONO CONSULTING FOR APPROVAL.
3. ALL DEMOLITION DEBRIS SHALL BE PROPERLY DISPOSED OF.

[illegible][illegible]

C-1.0